


# Assembly

1. Attach 5 Feet(B) to the Lower Pole(A) using the Screws(C)and Wrench(D),provided.
2. Slide one Square Support(F) down the Lower Pole(A).
3. Place 1 Cotter Pin(G) into the hole in Lower Pole(A),slide 1 Ball Bearing(H) down the Pole onto the Cotter Pin,Slide one Bushing(I) down on the Bearing, Lower 1 Square Support(F) onto the Bushing.
4. Insert the tapered end of the Upper Pole(E) into the Lower Pole. Secure it with the clip button.
5. Place 1 Cotter Pin(G) into the hole in Upper Pole(E),Slide 1 Ball Bearing(H) down the Pole onto the Cotter Pin,Slide one Bushing(I) down on the Bearing, Lower 1 Square Support(F) onto the Bushing.
6. Align the sides of the Square Supports.
7. Ensuring that all the hooks are engaged,hanging the 4 Side Panels(K) on the Supports.
8. Insert the Sign Holder(J) into the Upper Pole.
9. Tighten the Spinner Lock,ensure that the Square Support can't move.

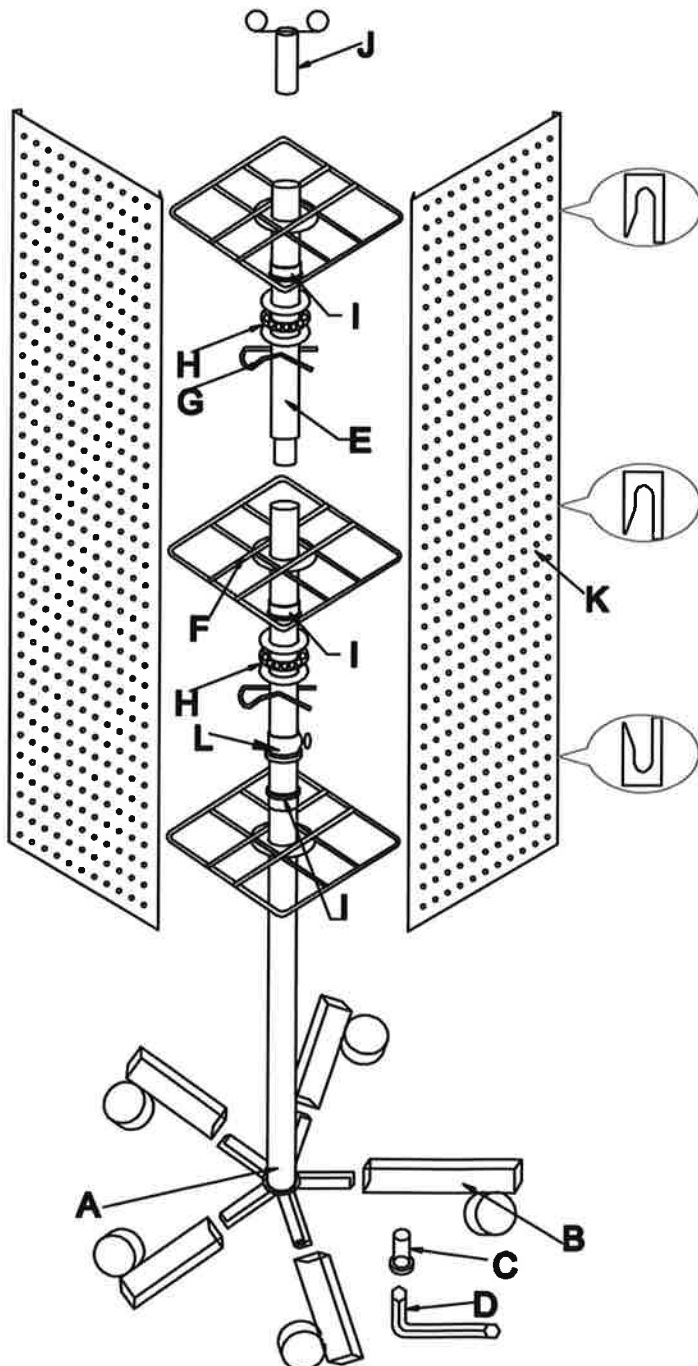

## Parts List

- A-Lower Pole(1pc)
- B-Foot(5pcs)
- C-Screw(5pcs)
- D-Wrench(1pc)
- E-Upper Pole(1pc)
- F-Square Support(3pcs )
- G-Cotter Pin(2pcs)
- H-Bearings(2sets)
- I-Bushing(3pcs)
- J-Sign Holder(1pc)
- K-Pegboard panel(4pcs)
- L-Spinner Lock(1pc)